

WALL LAMP

1935/1936




Please read instructions before commencing installation and retain for future reference.



## Connecting the Terminal Block

Connect main supply (brown - live, blue - neutral, green/yellow - earth) into terminal block making sure all connections are tight.

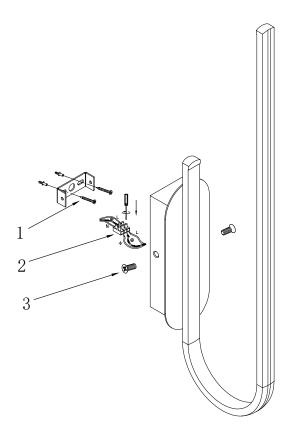

## **SPECIFICATIONS:**

- Fitting: ALUMINIUM + ACRYLIC
- Lamp type: LED 18W 3000K
  - Lamps and gears excluded unless otherwise specified
- Protection against electric shock: CLASS I, . Requires earth connection.
- Ingress Protection: IP20. Protection against entry of solid objects greater than 12mm in diameter.
- Quality/Corrosive rating: QC21: Burning period: 12hrs/24hr cycle. Commercial use, indoor mainly - painted or plated metals. Not for use in corrosive environments.

## **INSTALLATION INSTRUCTIONS:**

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

- Ensure mains supply is switched off.
- Insert masonry plugs into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws(1).
- Connect main supply wires to terminal block (2) making sure all connections are tight.
- Fit ceiling cup onto mounting bracket with screws (3).
- Reconnect power.

## **WARNING:**

Not for outdoor use or in wet conditions.













