




INSTALLATION INSTRUCTION
LED WALL LAMP
VT-1178

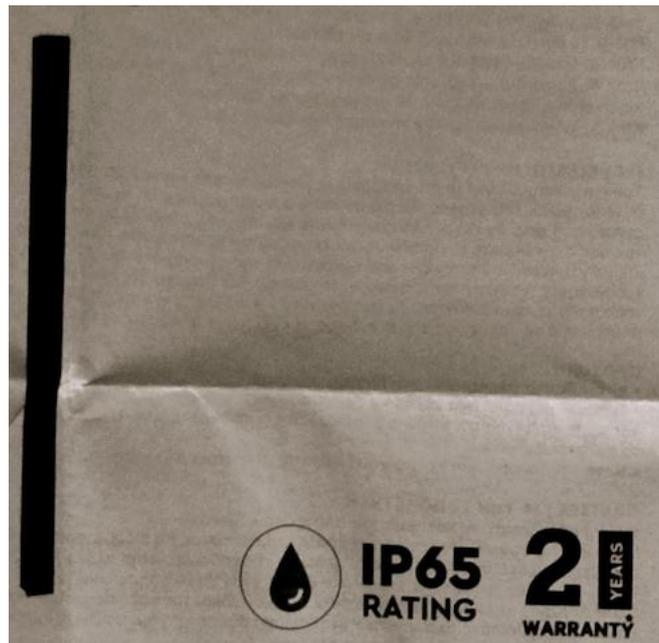

TECHNICAL DATA:

Model	Watts	Lumens	LED color	Beam angle	Body type	CRI	PF	Dimensions	Input power
VT-1178	23W	2875	3000K	150°	Aluminum	>90	>0.7	1410*60*50mm	AC:220-240V,50Hz
VT-1178	23W	3150	4000K	150°	Aluminum	>90	>0.7	1410*60*50mm	AC:220-240V,50Hz

INTRODUCTION & WARRANTY

Thank you for selecting and buying the V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other queries, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 hours daily operation. Usage of the product for 24 hours a day would void the warranty. This product is warranted to manufacturing defects only.

WARNING!

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source of this light is not replaceable, when the light source reaches its end of life, the whole light should be replaced.
- Proper grounding should be ensured throughout the installation.




This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION DIAGRAM

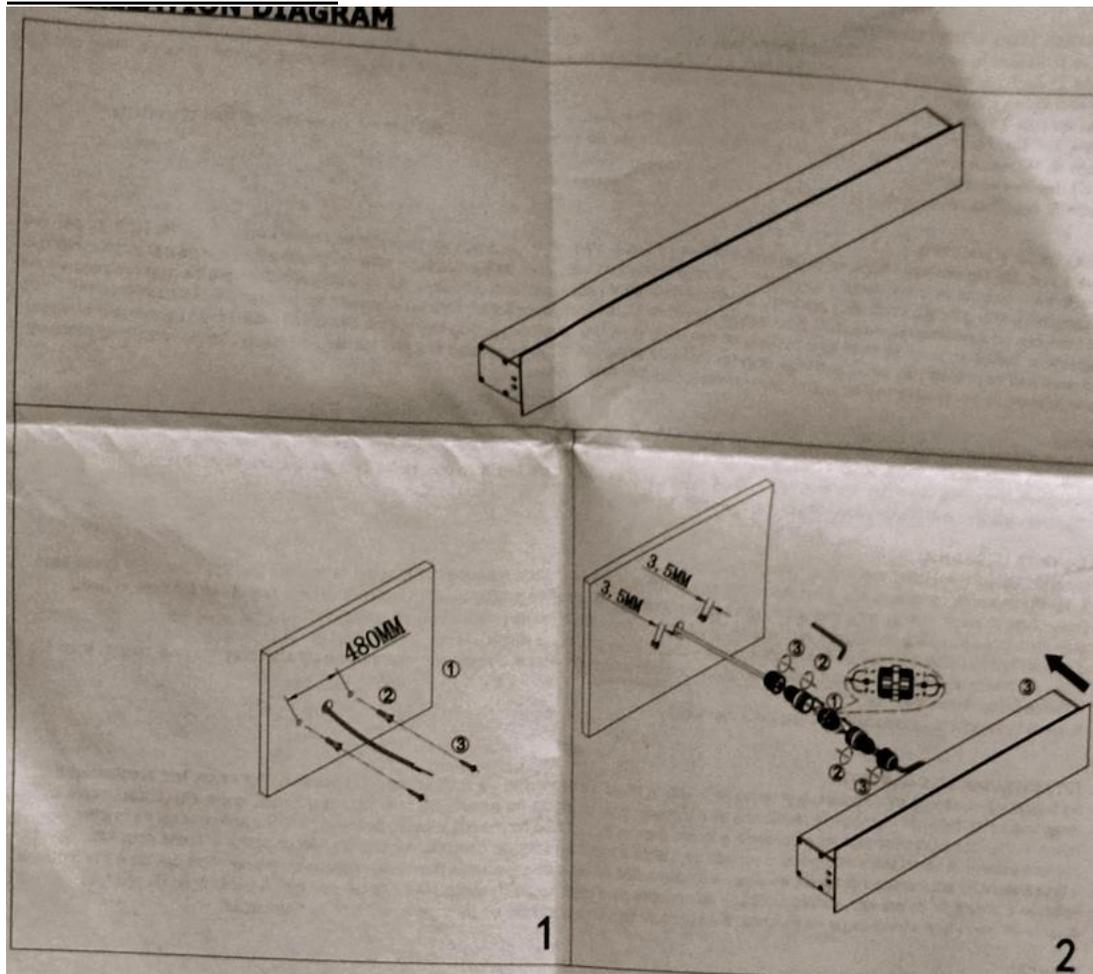

INSTALLATION INSTRUCTIONS

Step 1: Switch off the power before starting the installation.

Step 2: Release the base plate by unscrewing the set screws from the sides of the light by using an Allen wrench (included). Fix the power cable through the base plate, then drill the holes in the wall by using the base plate as a guide. Fix the base plate to the wall using the plugs and screws (included).

Step 3: Wire and connect the power cable to the terminal block.

Step 4: Mount the light on the base plate using the set screws. Make sure the set screws are properly fixed using the Allen screws.

Step 5: Switch on the power to test the light.